

## Global Presence

ITT is a diversified leading manufacturer of highly engineered critical components and customized technology solutions for growing industrial end-markets in energy infrastructure, electronics, aerospace and transportation.

Building on its heritage of innovation, ITT partners with its customers to deliver enduring solutions to the key industries that underpin our modern way of life. Founded in 1920, ITT is headquartered in White Plains, NY, with employees in more than fifteen countries and sales in more than 125 countries. The company generated pro forma 2010 revenues of approximately \$2 billion. For more information, visit [www.itt.com](http://www.itt.com).

ITT Enidine's customer service staff and technical sales personnel are available to assist you with all of your application needs.

Operating with lean manufacturing and cellular production, ITT Enidine produces higher quality custom and standard products with greater efficiency and within shorter lead times.

ITT Enidine's comprehensive website is full of application information, technical data and sizing examples that will assist you in selecting the product that's right for you.

Our website also features a worldwide representative lookup to help facilitate fast, localized service. For application assistance call our technical help line at 1.800.852.8508 ext.253.

ITT Enidine engineers continue to monitor and influence trends in the motion control industry, allowing us to remain at the forefront of new energy absorption and vibration isolation product development.

Our experienced engineering team has designed custom solutions for a wide variety of challenging applications, including recoil buffer technologies and Counter I.E.D. Electronics Isolators, among others.

These custom application solutions have proven to be critical to our customers' success. Let our engineers do the same for you.



ENGINEERED FOR LIFE

ITT Enidine Inc.  
7 Centre Drive  
Orchard Park, New York 14127  
Phone: 716-662-1900  
Fax: 716-667-1385  
Email: [industrialsales@itt.com](mailto:industrialsales@itt.com)  
[www.enidine.com](http://www.enidine.com)

## Jarret Springs for Work Roll Chock Separation




ENGINEERED FOR LIFE

# Jarret Springs for Automatic Work Roll Chock Separation

## INTRODUCTION

JARRET devices are designed and built on the principle of the compression, and the shear characteristics, of specially formulated silicone compounds (JARRET patents). These characteristics enable the JARRET device to be designed as an energy storing device (a spring) or an energy dissipating device (a shock absorber) or a combination of both. By modifying the geometry of the unit and selecting an appropriate silicone compound, emphasis can be placed either on the energy storing function or on the energy dissipating function

## OPERATING CONDITIONS OF THE JARRET SPRING

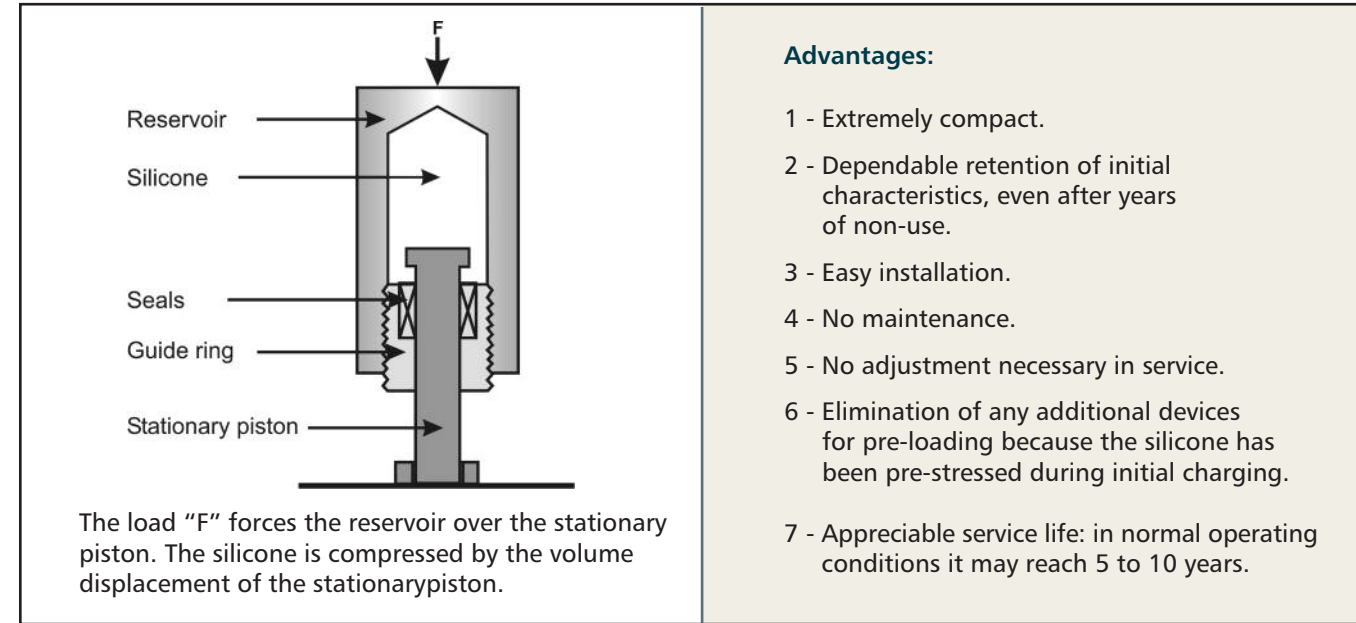

## JARRET SPRINGS FOR AUTOMATIC WORK ROLL CHOCK SEPARATION

The weight of the top work roll and chock assembly is supported on two or four JARRET springs. The units are pre-stressed to a load approximately 10% higher than the weight of the top roll assembly. Consequently, when the top roll assembly is resting on the springs, there is no movement or compression.

When the top back-up roll is forced down on the top work roll to the desired roll gap, the JARRET units are compressed and remain in the compressed position during the rolling operation.

When the top back-up roll is removed, the JARRET units force the top work roll and chock assembly upwards to their fully extended position, maintaining the two work rolls at a constant center-to-center distance.

The JARRET spring is located in a vertical cavity in the bottom work roll chock, with the piston facing down, resting on the bottom of the cavity or on a replaceable thrust plate.

The JARRET device acts as a compact, high-quality dependable spring:

- a) It maintains the top work roll assembly in an elevated position when the mill is not running, yet does not interfere with the rolling operation.
- b) The work rolls are maintained separated at a constant center-to-center distance during installation, removal and transfer of rolls.

- c) The rolls are prevented from coming into contact with one another, thereby avoiding damage to the roll surfaces.
- d) The use of JARRET springs eliminates the need to jack up the top work roll and then block or latch for correct roll separation on fixed centers. In doing so it eliminates the need for additional shimming required for the safe and stable transportation of roll assemblies and obviates the need for troublesome latching mechanisms.
- e) The use of JARRET springs "reduces time required for roll changing" to one-fourth of the time taken by conventional methods.
- f) In some applications JARRET springs can be used for back-up roll counter balance.

By the use of hydraulic pressure under the JARRET springs, the top work roll assembly may be raised higher than the normal extended position the spring allows. This is achieved by the hydraulic pressure raising the complete spring off its seat in the base of the cavity. During rolling, this hydraulic pressure may be used to create upward forces to correct roll bending, reduce work roll skidding or counterbalance the top back-up roll

### Stroke calculation:


$S = \text{maximum diameter} - \text{minimum diameter} + d + \text{extra}$   
 $S = \text{center to center distance} - \text{minimum diameter} + \text{extra}$

### Load per JARRET spring calculation:

Top work roll chock assembly weight divided by total number of JARRET springs used (generally two per chock).

### Note:

JARRET springs may also be used as plungers in combination with hydraulic pressure (as for roll bending, etc...)

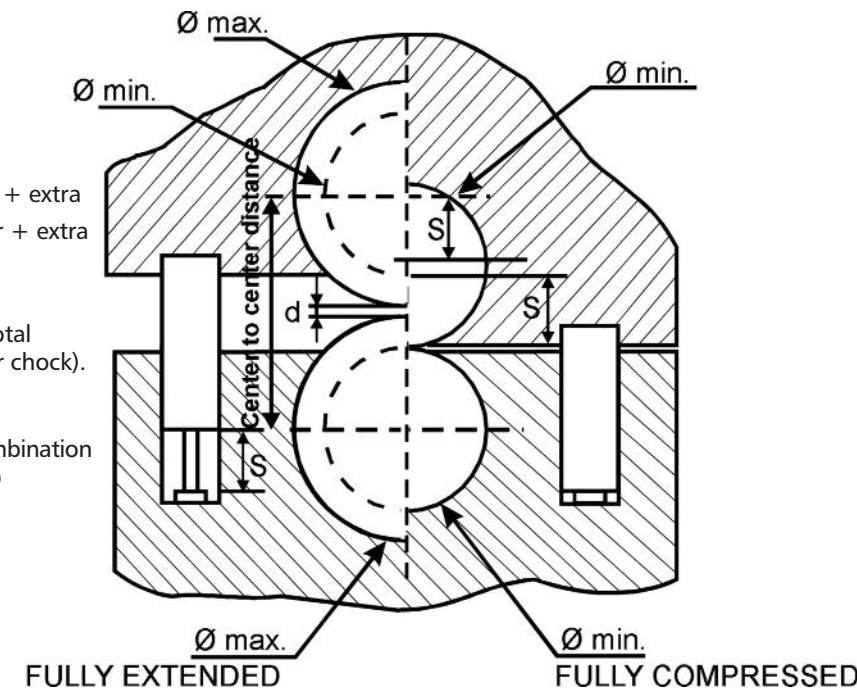

## Hysteresis

The actual hysteresis is between 5 and 10 percent and does not in practice negatively affect strip shape control or AGC.

## Temperature

JARRET Springs use silicone compounds that retain their properties over a wide temperature range. However, since their coefficient of expansion is greater than that of steel, a variation in temperature causes a change in force level. All force values listed for any spring are rated at a temperature of +20° C.

- Allowable extremes: - 40° C to + 70° C
- Recommended limits: - 20° C to + 50° C

## Applications


Hot strip mills, Cold strip mills, Skin pass mills, Tin mills, Temper mills, Plate mills, Slab/Bloom mills, Bar mills, Rod mills.

## References (Mill Manufacturers)



U.S.A.		CANADA	
SMS-DEMAG	DMS - BLISS	DOMINION ENGINEERING	WORKS
FATA-HUNTER	MORGAN CONSTRUCTION	VOEST ALPINE	
DANIELI UNITED ENGINEERING	TIPPINS, INC.	I.H.I.	
		HITACHI	
		VAI CLECIM	
GERMANY		FRANCE	
SKET			
KOCH			
SUNDWIG			
SMS DEMAG			

## DATA REQUIRED TO SELECT A JARRET SPRING

### D.C.1 Common reservoir end designs

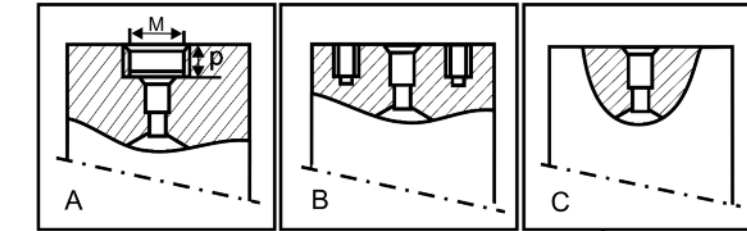


### D.C.2 Common reservoir configurations




D.C.3		
Zinc plated A	Hard chromed B	No Protection C

### CM



RF : Recalling Force = (weight x 1.1)  
 MR : Maximum reaction  
 S : Stroke

### D.C.5 End of piston with or without provision for hydraulic fluid entry

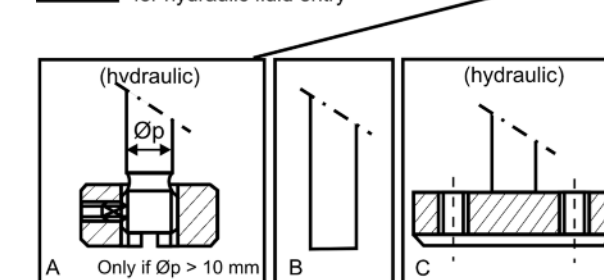

### NOMENCLATURE

- CM** = Mechanical characteristics  
RF ; MR ; S
- CG** = Geometrical characteristics  
L1 ; L2 ; L3 ; L4 ; L5 ; Ø1 ; Ø2 ; Ø3 ; M ; P
- DC** = Details of design  
1 (A, B, C) ; 2 (A, B) ; 3 (A, B, C) ; 4 (A, B) ; 5 (A, B, C)

### NOTE

Example of nomenclature of the JARRET Spring shown above  
 CM : RF 11000 ; MR 33000 ; S 45  
 CG : L1 220 ; L2 152 ; Ø1 80  
 DC : 1C ; 2A ; 3A ; 4A ; 5B